


COMPLETE 250 TPD STOCK PREPARATION LINE FOR RECYCLING PAPER/BOARD

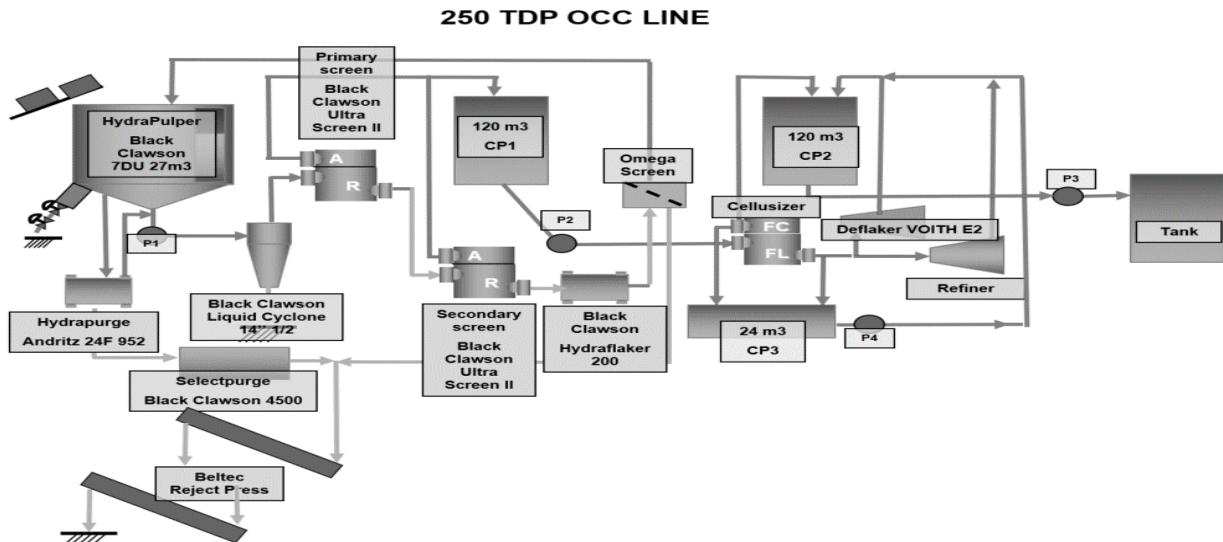

Consisting of:

Pulper

- Manufacturer : BLACK CLAWON
- Type : D
- Size : 7 DU
- Capacity : 27 m3
- Rotor : 240 rpm
- Plate diam. : 12 mm
- Motor : 220 kW 1.000 rpm
- Ragger : 0,75 kW
- Juk box : 168L VA, diam. 400 mm

Hydrapurge

- Manufacturer : ANDRITZ
- Type : Hydrapurge 24 F 952
- Capacity : 900 l
- Rotor : 24 pound, 510 rpm
- Plate diam. : 10 mm
- Motor : 55 kW, 1.500 rpm

Selectpurge

- Manufacturer : BLACK CLAWSON
- Type : Selectpurge 4500
- Diam. : 10 mm, 30 rpm
- Motor : 2,2 kW, 1.500 rpm



Reject press

- Manufacturer : BELTEC BP601 year 2003
- Capacity 2,5 Tm/hours
- Dryness 50 – 75 %

Liquid cyclone 14"1/2

- SAS 33L 8"
- Nominal flow rate : 4.380 l/min.
- AP: 15 m

Primary screen

- Manufacturer: BLACK CLAWSON
- Model: Ultrascreen UPII
- Max. pressure: 6 bars
- Sieve // 0,50 cutter sieve
- Max. AP: 0,5
- Rotor: 4 blades, 650 rpm
- Reject: 30 %, 1.500 l/min.
- Accepts: 3.580 l/min.
- Motor: 90 kW, 1.500 rpm

Secondary screen

- Manufacturer: BLACK CLAWSON
- Model: Ultrascreen UPII
- Max. pressure: 6 bars
- Sieve // 0,40 thread cutter
- Max. AP: 0,5
- Rotor: 4 blades, 650 rpm
- Reject: 30 %, 1.500 l/min.
- Accepts: 3.580 l/min.
- Motor: 90 kW, 1.500 rpm





Hydraflaker

- Manufacturer: BLACK CLAWSON
- Model: 200
- Rotor Z 30C 13
- 55 + 24h
- Motor: 55 kW, 1.500 rpm



Kadant Boostek

- Model BTK080
- Year 2018

Fibernet Kadant

- Model FNK5
- Year 2018
- Slotted basket 2 steps

Deflaker

- Manufacturer: VOITH
- Type: 2E
- Inlet flow rate: 80 m³/h
- Power consumption: 125 HW/h
- Motor: 160 kW, 1.500 rpm
- 2 stators: diam. 510 mm, thickness: 30 mm (lateral)
- 1 rotor: diam. 510 mm, thickness: 34 mm (central)
- Installed power: 220 kW

Hydradense

- Manufacturer: KADANT
- Type: MB 246 F
- Screw and grid

Refiner Jylhafinner

- Model DD550
- Power motor 315 kW/1.500 rpm

